



YES Plus LGA is a multi-gas air quality monitoring and information recording instrument that simultaneously measures and records up to fifteen sensors. With more than 30 different plug and play sensors to select from, users can accurately monitor more within a single, easy to carry instrument.

Featuring a fifteen channel sensor capacity including RH and temperature, YES Plus LGA can handle up to 12 additional plug & play sensors consisting of a maximum of eight electrochemical toxic gas or oxygen sensors, four high current draw sensors such as an infrared, PID or catalytic.

The large, backlit, multi-line scrolling LCD display indicates the sensor types installed and measured values for each gas, battery status and more. The system utilizes a long life rechargeable NiMH battery pack providing more than 24-hours of run time, depending on sensor array installed. The user can also set one alarm level for each gas to activate the internal audible alarm. The system is housed in a rugged ABS enclosure with swivel handle to act as a stand support or for carrying the instrument.

An air sample from the target environment is delivered to the sensors through "active sampling" by the internal sample draw pump. More than a million data points can be logged and stored on a built-in 2 GB SD memory card for convenience.

The optional YES Logger package consists of a 2 GB SD memory card and card reader, USB cable and YES Viewer Software. The card reader stores the data which can be transferred. Alternatively, data can be downloaded through the device using a standard USB connection. Our proprietary YES Viewer Software will allow users to analyze and graph the data.


### KEY FEATURES

- » 15 sensor capacity
- » > 30 plug & play sensor choices
- » Extensive, easy to use menu system
- » Rugged ABS enclosure with swivel handle acts as stand support
- » Internal sample pump with inline filter
- » Large, backlit, multi-line, LCD display
- » Data logging to SD memory card
- » Menu control positive sampling
- » RoHS compliant circuit boards

### APPLICATIONS

- » Residential Buildings
- » Commercial Buildings
- » Hospitals
- » Laboratories
- » Research Facilities
- » Parking Garages
- » ... and many more

### TECHNICAL DRAWING

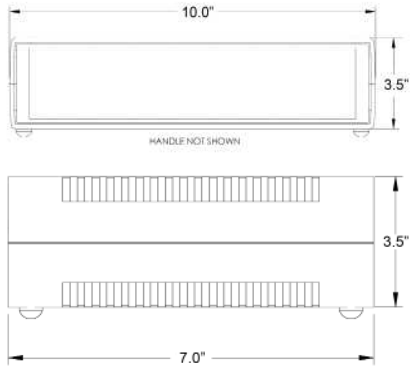

YES Plus LGA is housed in a rugged ABS enclosure with swivel handle to act as a stand support or for carrying the instrument.



# YES Plus LGA 15-Channel IAQ Monitor

## TECHNICAL SPECIFICATIONS

### MECHANICAL

Enclosure	Rugged ABS (UL94-HB rated) c/w multi-position, adjustable aluminum carrying handle/stand
Weight	1.7 kg (3.6 lb)
Size	10.0" x 3.5" x 7.0" (254 mm x 89 mm x 178 mm)

### ELECTRICAL

Power	Rechargeable NiMH battery pack: 18 - 24 hours of continuous operation time (dependent upon the sensor array installed) c/w plug-in battery charger / 12 VDC wall adapter (100 - 240 VAC; 50 - 60 Hz)
Circuit	Powerful microprocessor, user configurable
Sampling	Internal, automatic sample pump for "active" sampling of target environment

### ENVIRONMENTAL (sensor dependant)

Operating Temperature	5°C to 50°C (41°F to 122°F)
Humidity	0 - 99% RH non-condensing

### CERTIFICATION

CE	Pending
----	---------

## PRODUCT CODES

YES-PLUS-LGA	Temperature and RH sensors, internal pump, inline filter, rechargeable battery, internal data logging, capacity for 12 gas sensors
--------------	------------------------------------------------------------------------------------------------------------------------------------------

### SENSOR OPTIONS

<b>PNP-H</b>	Ammonia (NH <sub>3</sub> ) electrochemical, 0 - 50 ppm
<b>PNP-R</b>	Arsine (AsH <sub>3</sub> ) electrochemical, 0 - 2 ppm
<b>PNP-A+</b>	Carbon dioxide (CO <sub>2</sub> ) infrared, 0 - 5,000 ppm
<b>PNP-A1</b>	Carbon dioxide (CO <sub>2</sub> ) infrared, 0 - 10,000 ppm
<b>PNP-A2</b>	Carbon dioxide (CO <sub>2</sub> ) infrared, 0 - 20% volume
<b>PNP-B</b>	Carbon dioxide (CO <sub>2</sub> ) infrared, 0 - 5% volume
<b>PNP-B1</b>	Carbon dioxide (CO <sub>2</sub> ) infrared, 0 - 100% volume
<b>PNP-C</b>	Carbon monoxide (CO) electrochemical, 0 - 50 ppm
<b>PNP-C1</b>	Carbon monoxide (CO) electrochemical, 0 - 50 ppm (H <sub>2</sub> compensated for use in H <sub>2</sub> background)
<b>PNP-I</b>	Chlorine (Cl <sub>2</sub> ) electrochemical, 0 - 5 ppm
<b>PNP-J</b>	Chlorine dioxide (ClO <sub>2</sub> ) electrochemical, 0 - 1 ppm
<b>PNP-X</b>	Combustibles (catalytic), 0 - 100% LEL
<b>PNP-E1</b>	Ethylene (C <sub>2</sub> H <sub>4</sub> ), 0 - 200 ppm

## PRODUCT CODES continued

<b>PNP-E2</b>	Ethylene oxide (C <sub>2</sub> H <sub>4</sub> O), 0 - 20 ppm
<b>PNP-S</b>	Fluorine (F <sub>2</sub> ) electrochemical, 0 - 2 ppm
<b>PNP-Q</b>	Formaldehyde (CH <sub>2</sub> O) electrochemical, 0 - 5 ppm
<b>PNP-K</b>	Hydrogen (H <sub>2</sub> ) electrochemical, 0 - 1,000 ppm
<b>PNP-M</b>	Hydrogen chloride (HCl) electrochemical, 0 - 30 ppm
<b>PNP-N</b>	Hydrogen cyanide (HCN) electrochemical, 0 - 100 ppm
<b>PNP-O</b>	Hydrogen fluoride (HF) electrochemical, 0 - 10 ppm
<b>PNP-L</b>	Hydrogen sulphide (H <sub>2</sub> S) electrochemical, 0 - 50 ppm
<b>PNP-B+</b>	Methane (CH <sub>4</sub> ) infrared, 0 - 5% volume
<b>PNP-E</b>	Nitric oxide (NO) electrochemical, 0 - 100 ppm
<b>PNP-D</b>	Nitrogen dioxide (NO <sub>2</sub> ) electrochemical, 0 - 5 ppm
<b>PNP-F</b>	Oxygen (O <sub>2</sub> ) electrochemical, 0 - 25% volume
<b>PNP-G</b>	Ozone (O <sub>3</sub> ) electrochemical, 0 - 1 ppm
<b>PNP-V</b>	Phosphine (PH <sub>3</sub> ) electrochemical, 0 - 1 ppm
<b>PNP-W</b>	Silane (SiH <sub>4</sub> ) electrochemical, 0 - 50 ppm
<b>PNP-P</b>	Sulphur dioxide (SO <sub>2</sub> ) electrochemical, 0 - 20 ppm
<b>PNP-Y+</b>	TVOCs (PID), 0 - 300 ppm
<b>PNP-Z+</b>	TVOCs (PID), 0 - 30 ppm

### ACCESSORIES

<b>718</b>	Deluxe hard shell carrying case for YES Plus LGA
<b>CET-8000-CKFT</b>	Standard yellow gas flow tubing for calibration, 2 ft, 3/16" ID / 5/16" OD, priced per foot
<b>CET-8000-CTFT</b>	Teflon lined gas flow tubing for calibrating sticky gases, special non-absorbent, 2 ft, 3/16" ID / 5/16" OD, priced per foot
<b>REG-ADAPTER</b>	Brass fitting that threads onto regulator to accom- modate 15 and 17 litre cylinders
<b>REG-07DF-CR2</b>	Demand flow regulator for calibrating YESAIR pump model and YES Plus LGA
<b>YES-AIR LGR PKG</b>	YES Logger package with 2 GB memory card, card reader, USB cable, YES Viewer Software
<b>LGA-HH- PROBE-30</b>	Handheld 10" probe with 30" of sample hose
<b>YES-SFTWR</b>	YES Viewer data logging software (USB drive)

**NOTE:** In addition to the temperature and RH sensors, the YES Plus LGA can handle up to 12 additional sensors consisting of a maximum of eight electrochemical toxic gas or oxygen sensors, four high current draw sensors such as an infrared PID or catalytic.